


DOUBLE-GLASS BIFACIAL N-TYPE 605~620 Watt



TOPCon

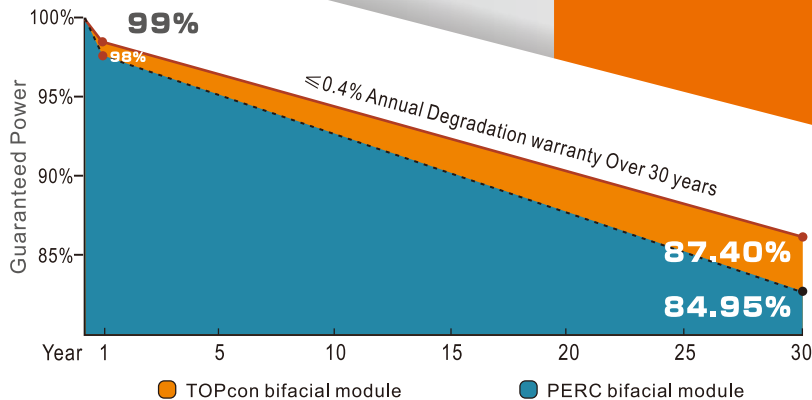

Bifacial Mono Module

Capable of generating power at back side, at least 80% efficiency of the front side



Anti-PID (potential induced degradation)

Passed anti-PID test under 85°C damp heat 85% relative humidity for 192 hours



Great Durability against extreme conditions

Passed salt mist corrosion test, ammonia corrosion test dust & sand test, fire test, all certified by TÜV



Lower LCOE

Lower shading and resistive loss
Lower temperature coefficient



Outstanding mechanical load resistance

2400 Pa wind load, 5400 Pa snow load



15-year product warranty

30-year linear power output



CEC Listed



IEC 61215, IEC 61730

ISO 9001: 2015 (Quality management systems)

ISO 14001: 2015 (Environmental management systems)

ISO 45001: 2018 (Occupational health and safety)

UNI 9177 la CLASSE DI REAZIONE AL FUOCO: 1



Add: No. 238 Yunlin Middle Road, Wangchun Industrial District, Ningbo China

Tel: +86-574-28828939

Email: sales@ulsolar.com.cn

Fax: +86-574-28828997

Web: www.ulicasolar.com

TOPCon(N TYPE) 605~620Watt



ELECTRICAL SPECIFICATIONS

Module Type	UL-605M-156ADGN			UL-610M-156ADGN		UL-615M-156ADGN		UL-620M-156ADGN	
		STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*
Maximum Power (Pmax)	W	605	458	610	462	615	466	620	470
Maximum Power Voltage (Vmp)	V	48.10	44.25	48.28	44.42	48.40	44.53	48.60	44.71
Maximum Power Current (Imp)	A	12.58	10.36	12.63	10.41	12.71	10.47	12.76	10.51
Open-circuit Voltage (Voc)	V	56.95	51.82	57.08	51.94	57.21	52.06	57.41	52.24
Short-circuit Current (Isc)	A	13.28	10.71	13.32	10.74	13.36	10.78	13.40	10.81
Module Efficiency STC	%	22.40		22.58		22.77		22.95	
Operating Temperature					-40°C~85°C				
Maximum system voltage					DC1500V(IEC)				
Maximum series fuse rating					30A				
Power tolerance					0~+5Watt				
Temperature coefficients of Pmax					-0.29%/°C				
Temperature coefficients of Voc					-0.25%/°C				
Temperature coefficients of Isc					0.046%/°C				
Nominal operating cell temperature (NOCT)					43±2°C				

*STC : Cell temperature: 25°C, Irradiance: 1000 W/m², Air mass: 1.5G

*NOCT : Air temperature: 20°C, Irradiance: 800 W/m², Air mass: 1.5G, Wind speed: 1 m/s

SPECIFICATIONS



Cell Type	N type Mono-crystalline	
No. of cells	156(6×13×2)	
Dimensions	2382*1134*30mm	
Weight	32.0kg	
Glass	2.0mm+2.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Junction Box	IP68, 3 diodes	
Connector	MC4 Compatible	
Cable Length (including Connector)	4mm² Landscape: (+)1400mm/(-)1400mm or Customized Length	
Packaging Configuration	Two Box=One Pallet 36pcs/Box, 72pcs/Pallet, 720pcs/40HQ Container	

Electrical characteristics with different rear side power gain(reference to 610 W front)



Pmax/W	Voc/V	Isc/A	Vmp/V	Imp/A	Pmax gain
610	57.08	13.32	48.28	12.63	0%
641	57.08	13.99	48.28	13.27	5%
671	57.08	14.65	48.28	13.90	10%
702	57.08	15.32	48.28	14.53	15%
732	57.08	15.98	48.28	15.16	20%
763	57.08	16.65	48.28	15.79	25%
793	57.08	17.32	48.28	16.43	30%

I-V CURVE

I-V characteristics at different irradiances (reference to 610 W)

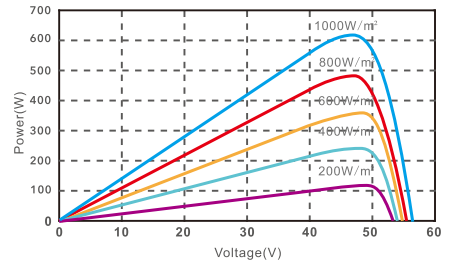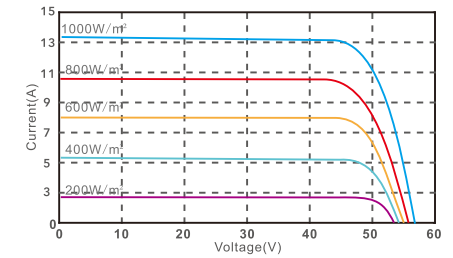

I-V characteristics at different temperature

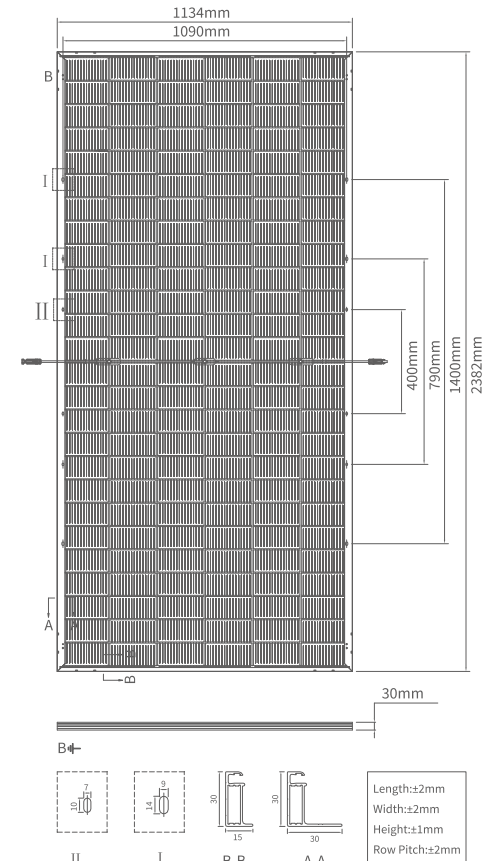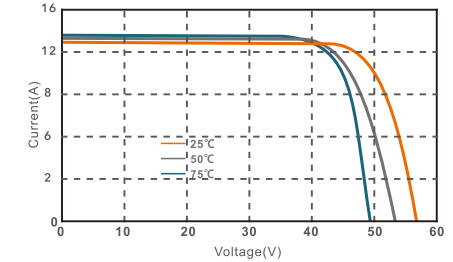

Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version No.: UL-2382-156ADGNBBC-30-EN-V1.0